


数量計算書

名 称	細別	計 算 式			単位	数 量
土工						
掘削工	機械	2.0*60.0	=	120.0	m ³	120
埋戻工	流用土・人力	2.2*60.0	=	132.0	m ³	132
不足土	良質土	132.0/0.9-120.0	=	26.7	m ³	27
法面整形		(0.5+0.5)*60.0	=	60.0	m ²	60
水路工						
フルーム型水路	H1200×W600	60.0	=	60.0	m	60
撤去工						
コンクリート取壊し	無筋	6.6+2.4+1.0+3.6	=	13.6	m ³	14
Co殻処分工	無筋	6.6+2.4	=	9.0	m ³	9
	二次製品	1.0+3.6	=	4.6	m ³	5
仮設工						
敷鉄板設置撤去	22*1524*3048	1.524*3.048*57	=	264.8	m ²	265
土工マット		5.0*60.0	=	300.0	m ²	300
土のう設置		0.3*0.2*60.0+0.09	=	3.7	m ³	4
耕起復旧		5.0*60.0	=	300.0	m ²	300
水替ポンプ設置撤去	φ 50mm	1	=	1	台	1

構造物撤去工
組立水路 H600×W600

1式当り

Technical drawing of a rectangular structure with a central opening. The drawing shows a cross-section with dimensions: overall width 840, overall height 600, and a central opening with a top width of 600, a bottom width of 440, and a height of 120. A label "構造物取壊し 無筋" (Structure to be demolished, unreinforced) points to the top left corner. A note "7-4 0.21m²" is at the bottom right.

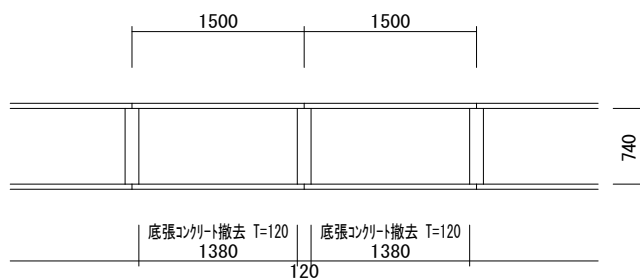

既設水路取壊し L=60.0m
N=60.0m/1.5m=40スパン
構造物取壊し L=40.0m

[illegible]